

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)

Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1002.2.72

Total Pages

28

First Named Inventor or Application Identifier

Larry Stevens

Express Mail Label No.

EL190177409US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification (Total Pages )  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross References to Related Application
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) (Total Sheets )
4. Oath or Declaration (Total Pages )
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation /divisional with Box 17 completed)  
(Note Box 5 below)
    - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which  
a copy of the oath or declaration is supplied under Box  
4b is considered as being part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if  
applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - a. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
if foreign priority is claimed
16. ☒ Other: Express Mail Certificate

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No.:

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

21552

or ☐ Correspondence address below

NAME

Gary D.E. Pierce

ADDRESS

CITY

STATE

ZIP

COUNTRY

TELEPHONE

FAX

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Label No. EL190177409US

PATENT APPLICATION  
DOCKET NO. 1002.2.72


UNITED STATES PATENT APPLICATION

of

LARRY STEVENS

for

SYSTEM AND METHOD FOR BONDING  
AN ACRYLIC SURFACE TO A FRAME



**SYSTEM AND METHOD FOR BONDING  
AN ACRYLIC SURFACE TO A FRAME**

Field of the Invention

5           The present invention relates to a system and method  
for bonding an acrylic surface to a frame. More particular-  
ly, the present invention is directed to a system and method  
for adhesively bonding an acrylic basketball backboard to a  
frame structure.

Background

10           As the game of basketball has increased in popularity,  
a greater number of people have purchased basketball systems  
for use at their homes. Such basketball systems typically  
comprise at least a pole to which a backboard and a goal is  
15           secured so that the goal is suspended above a playing sur-  
face. The basketball backboard can be made of a variety of  
materials including various polymers and composites. Clear  
acrylic backboards are becoming increasingly popular because  
20           they resemble professional backboards.

          There are several problems which must be overcome to  
successfully use an acrylic basketball backboard. First,  
the backboard must be adequately bonded to a support frame.  
Second, there must be sufficient flexibility in the bond to  
25           dissipate the impact energy from the backboard to the frame.  
If the bond between the backboard and frame is too rigid,

then the backboard can fracture. If the bond is too loose, then the adhesion fails.

One successful resolution of this problem has been the use of two-sided tape having a foam center. One suitable tape, known as "VHB" tape, is commercially available from 3M and Norton. The tape is typically applied to the frame structure, and then the acrylic backboard is pressed on the taped frame.

A significant problem with the use of the two-sided tape described above is the time and labor required to apply the tape to the frame. Currently, substantial manual labor is used to prepare the acrylic backboard surface and frame surface to receive the adhesive tape, to manually lay the tape, and to press the taped backboard and frame together. It would be a substantial improvement in the art to automate the labor-intensive steps in assembly of an acrylic basketball backboard.

Such an automated system and method for bonding an acrylic surface to a frame is disclosed and claimed herein.

#### Summary of the Invention

The present invention relates to an acrylic basketball backboard assembly and to a method of bonding an acrylic basketball backboard to a frame structure. The assembly includes a basketball backboard frame structure and an acrylic backboard which are bonded together with a suitable elastomeric adhesive. Silicone adhesive is currently pre-

ferred because of its excellent adhesion and flexibility and low cost. The elastomeric adhesive replaces conventional VHB double-sided tape. Applying adhesive to either the backboard or frame structure can be automated and performed by commercially available robotic equipment, thereby improving the efficiency and cost of the basketball backboard assembly process.

A significant problem with most elastomeric adhesives is the long cure time. This problem was solved according to the present invention by using a catalyzed adhesive. The amount of cure catalyst used can vary to provide an optimum set time. Currently, the adhesive is configured to provide a set time in the range from about 5 minutes to 1 hour, and more preferably from about 7 to 15 minutes.

Another problem with elastomeric adhesives was the need to provide controlled and reproducible adhesion and flexibility of the adhesive bond. It was observed that the bond gap directly affected adhesion and flexibility. For example, if the bond gap was too great, good flexibility was observed at the expense of adhesion, with cohesive failure occurring. If the bond gap was too little, good adhesion was obtained at the expense of flexibility. Thus, there was a need to control the bond gap. The currently preferred adhesive bond gap is in the range from about 2 to 2.5 mm.

The bond gap is preferably controlled according to the present invention by including a plurality of bond gap spacers within the adhesive bond. The bond gap spacers are

positioned between the frame bonding surface and the backboard bonding surface to provide the bond gap. A variety of different bond gap spacers can be used according to the present invention. Spherical beads, such as glass microspheres, are currently preferred.

#### Description of the Drawings

Figure 1 is a cross-sectional view of an acrylic backboard bonded to a frame structure.

#### Description of the Invention

The present invention is directed to an acrylic basketball backboard assembly and to a method of bonding an acrylic basketball backboard to a frame structure. Figure 1 shows cross-sectional view of a cut-away portion of an acrylic basketball backboard assembly 10. The backboard assembly 10 includes an acrylic backboard 12 bonded to a frame structure 14. The backboard 12 includes a backboard bonding surface 16, and the frame structure 14 includes a frame bonding surface 18. An elastomeric adhesive 20 is sandwiched between the two bonding surfaces 16 and 18. The elastomeric adhesive 20 replaces the VHB double-sided tape currently used with acrylic backboards.

After testing a large number of different elastomeric adhesives from different suppliers, silicone adhesive was preferred because it provides a bond of sufficient strength and flexibility, comparable to that obtained with conven-

tional foam filled, two-sided tape. It was also preferred because of its low cost and availability. Other adhesives, such as urethane, polyurethane, hot melt adhesives, methylmethacrylate, and cyanoacrylate adhesives did not perform as well as silicone in providing the desired balance between bond strength and flexibility and/or were more expensive. Although other elastomeric adhesives can be made suitable for use in the present invention, silicone adhesive is currently preferred and will be discussed below.

Suitable silicone adhesive has been obtained from General Electric (D1-SEA 210) and from Dow Corning (Q3-6093). The commercially available silicone adhesive includes dimethylpolysiloxane as a primary ingredient, with N-propylsilicate, aminopropyltriethoxysilane, 1,3,5-tris(trimethoxysilyl)propylisocyanurate) as minor ingredients.

In a currently preferred embodiment, the silicone adhesive has a bond gap (labelled "A" in Figure 1) in the range from about 2 to 2.5 mm (0.08 to 0.1 inch). If the bond gap is too small, there is not sufficient flexibility in the bond to dissipate the impact energy from the backboard created when the basketball strikes the backboard. The bond between the backboard and frame is too rigid, and the backboard tends to fracture. If the bond gap is too great, there is good flexibility, but the bond is not strong enough. Adhesion failure occurs within the silicone adhesive itself and not at the bond interface with the backboard or frame.

To provide the currently preferred adhesive bond gap, bond gap spacers 22 are located between the frame bonding surface and the backboard bonding surface. Suitable spacers can be any rigid structure having the desired thickness which can maintain the gap between the frame and backboard bonding surfaces. Currently preferred bond gap spacers include spherical beads, and more preferably glass microspheres. Glass microspheres having a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch) function very well. Other bond gap spacers which have been used successfully include weed trimmer line and plastic beads.

One problem with conventional single stage silicone adhesive is its long cure time, typically about 24 hours or more. If the cure time is too great, then an undue amount of manufacturing space is required to store the backboard assemblies while they cure. This problem was solved according to the present invention by using a catalyzed silicone adhesive. Typical commercially available catalyzed silicone adhesives contain two parts: (1) the adhesive itself and (2) a separate catalyst which is mixed with the adhesive to initiate curing. The ratio of catalyst to adhesive is preferably combined to provide a set time in the range from 5 minutes to 1 hour, and more preferably a set time in the range from about 7 to 15 minutes. The set time is defined as the time at which the adhesive sets sufficiently to enable the backboard assembly to be moved and handled.



The present invention also includes a method of bonding an acrylic basketball backboard to a frame structure. The method can be automated and performed by a suitable robotic device, thereby substantially reducing the assembly time and manual labor previously required to prepare acrylic backboard assemblies.

In the method according to the present invention, the backboard and frame bonding surfaces are preferably prepared to receive the elastomeric adhesive. For the frame structure, this is typically performed by roughening the surface. For instance, the surface can be roughened by rubbing a scouring pad, of the type commonly found in kitchens, over the surface. The backboard frame structure is typically painted metal. The paint is preferably a powder coated paint composition.

For the acrylic surface, it must be chemically treated to break the surface tension of the acrylic surface. Although the treatment will vary depending on the adhesive used, it typically will include a chemical mixture of acetone and the adhesive itself. The appropriate acrylic surface preparation is usually provided by the supplier of the elastomeric adhesive.

It has been found that when the acrylic backboard bonding surface contains a printed image, the printing itself provides an adequate surface preparation for the elastomeric adhesive such that a separate backboard surface preparation step is not necessary.

In the method of bonding an acrylic basketball backboard to a frame structure, the elastomeric adhesive can be applied to either the acrylic backboard or frame structure bonding surface. For example, if the adhesive is applied to the bonding surface of the acrylic backboard, then the frame structure is placed against the backboard such that the bonding surface of the frame structure contacts the adhesive. Alternatively, if the adhesive is applied to the bonding surface of the frame structure, then the acrylic backboard is placed against the frame structure such that the bonding surface of the backboard contacts the adhesive.

In either case, a predetermined bond gap is maintained between the backboard bonding surface and the frame bonding surface. As discussed above, the bond gap is important to achieving a suitable balance between adhesion and flexibility. The method can include the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the desired adhesive bond gap. The bond gap spacers preferably provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch). Suitable bond gap spacers comprise spherical beads, such as glass microspheres, or other structures which are compatible with the adhesive. Glass microspheres are currently preferred because they are easily dispensed using an automated dispensing device. Furthermore, when silicone adhesive is used, the glass microspheres bond to the adhesive.

The elastomeric adhesive is allowed to cure. A catalyzed adhesive can be used to tailor the set time for elastomeric adhesives.

5 As discussed above, The method includes the step of preparing the frame structure bonding surface and the acrylic backboard bonding surface to receive the elastomeric adhesive. For the frame structure, this is usually a roughening of the surface. For the acrylic backboard, this is usually a chemical treatment specifically formulated for the adhesive being used. However, the step of preparing the acrylic backboard bonding surface to receive the adhesive can include printing an image on the bonding surface with an ink which securely bonds to the bonding surface.

10 Although the bond width (labelled "B" in Figure 1) is not critical to the present invention, it is presently preferred to apply the elastomeric adhesive with a bond width in the range from about 1 cm to 2 cm.

15 To evaluate various elastomeric adhesives, a standard test was developed to measure adhesion and flexibility. A baseline was obtained based upon the currently used double-sided VHB tape available from 3M and Norton. A digital level was used to measure flexibility, and a torque wrench was used to test adhesion.

20 Test specimens consisted of a 3-inch by 6-inch piece of acrylic and a 6-inch long powder coated 1-inch by 1-inch tubing to simulate a backboard frame. The acrylic and tubing were prepped to receive the double-sided VHB tape.

Ten specimens were prepared using 3M brand VHB tape, and ten specimens were prepared using Norton brand VHB tape. The test pieces were centered and bonded with the tape and ran through a compaction roller, to simulate conventional acrylic backboard assembly. The test pieces were allowed to sit 24 hours. The electronic level and torque wrench were then used to obtain a degree of deflection and a torque force at failure. The type of failure was also noted: either cohesive failure (tape fails with adhesion to both substrate), acrylic failure (acrylic does not adhere), and powder coat failure (powder coat does not adhere). All VHB tapes pieces showed cohesive failure.

All twenty tests were averaged to establish a baseline for elastomeric adhesives to meet or exceed. The baseline was a 20° deflection at 125 inch-pounds torque.

Various elastomeric adhesives were tested from the following manufacturers: Ashland, Ciba-Giga, Dapp, Devcon, Dow Corning, Elsworth, General Electric, Goop, Hysol, H.B. Fuller, and Resin Tech Group. It was found that the catalyzed silicone adhesive having the desired bond gap obtained from 25° to 45° deflection at 160 inch-pounds torque.

It will be appreciated that the present invention provides an acrylic basketball backboard which utilizes an elastomeric adhesive, such as silicone adhesive, to replace the conventional double-sided tape. The elastomeric adhesive provides good adhesion and flexibility. Advantageously, the labor-intensive steps in assembly of an acrylic

basketball backboard can be automated using the present invention. Furthermore, the elastomeric adhesive cost can also be less than the cost of the double-sided tape.

5 The present invention may be embodied in other specific forms without departing from its essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description.

10 What is claimed is:

1. A basketball backboard assembly comprising:  
a backboard frame structure having a bonding  
surface;

an acrylic backboard having a bonding surface; and

an elastomeric adhesive sandwiched between the  
frame bonding surface and the backboard bonding  
surface.

2. A basketball backboard assembly according to claim  
1, wherein the elastomeric adhesive has a bond gap in the  
range from about 2 to 2.5 mm (0.08 to 0.1 inch).

3. A basketball backboard assembly according to claim  
1, wherein the elastomeric adhesive is a catalyzed adhesive.

4. A basketball backboard assembly according to claim  
3, wherein the elastomeric adhesive is catalyzed silicone  
adhesive.

5. A basketball backboard assembly according to claim  
3, wherein the elastomeric adhesive is a two-part catalyzed  
adhesive in which the two parts are combined in a ratio to  
provide a set time in the range from about 7 to 15 minutes.

6. A basketball backboard assembly according to claim 3, wherein the elastomeric adhesive is a two-part catalyzed adhesive in which the two parts are combined in a ratio to provide a set time in the range from about 5 minutes to 1 hour.

7. A basketball backboard assembly according to claim 1, further comprising a plurality of bond gap spacers located between the frame bonding surface and the backboard bonding surface to provide a defined bond gap.

8. A basketball backboard assembly according to claim 7, wherein the plurality of bond gap spacers comprise spherical beads.

9. A basketball backboard assembly according to claim 8, wherein the spherical beads comprise glass microspheres.

10. A basketball backboard assembly according to claim 9, wherein the glass microspheres have a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

11. A basketball backboard assembly according to claim 1, wherein the backboard frame structure is metal.

12. A basketball backboard assembly according to claim 1, wherein the backboard frame structure is painted metal.

13. A basketball backboard assembly according to claim 1, wherein the backboard bonding surface contains a printed image.

5 14. A basketball backboard assembly comprising:

a metal backboard frame structure having a bonding surface;

an acrylic backboard having a bonding surface; and

a catalyzed silicone adhesive sandwiched between

10 the frame bonding surface and the backboard bonding surface, wherein the silicone adhesive has a bond gap in the range from about 2 to 2.5 mm, wherein the silicone adhesive is configured to provide a set time in the range from about 5 minutes to 1 hour; and

15 a plurality of bond gap spacers located between the frame bonding surface and the backboard bonding surface to provide the bond gap.

20 15. A basketball backboard assembly according to claim 14, wherein the silicone adhesive is configured to provide a set time in the range from about 7 to 15 minutes.

25 16. A basketball backboard assembly according to claim 14, wherein the plurality of bond gap spacers comprise spherical beads.



17. A basketball backboard assembly according to claim 16, wherein the spherical beads comprise glass microspheres.

18. A basketball backboard assembly according to claim 17, wherein the glass microspheres have a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

19. A method of bonding an acrylic basketball backboard to a frame structure comprising:

(a) applying an elastomeric adhesive to a bonding surface of the acrylic backboard;

(b) positioning a frame structure onto the acrylic backboard such that a bonding surface of the frame structure contacts the elastomeric adhesive;

(c) maintaining a predetermined bond gap between the backboard bonding surface and the frame bonding surface; and

(d) allowing the elastomeric adhesive to cure.

20. A method according to claim 19, wherein the elastomeric adhesive is a silicone adhesive.

21. A method according to claim 19, wherein the elastomeric adhesive is a urethane adhesive.

22. A method according to claim 19, further comprising the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive.

5 23. A method according to claim 22, wherein the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises printing an image on the bonding surface with an ink which securely bonds to the bonding surface.

10 24. A method according to claim 19, further comprising the step of preparing the frame structure bonding surface to receive the elastomeric adhesive.

15 25. A method according to claim 24, wherein the step of preparing the frame structure bonding surface to receive the elastomeric adhesive comprises roughening the frame bonding surface.

20 26. A method according to claim 19, further comprising the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the elastomeric adhesive bond gap.

25 27. A method according to claim 26, wherein the bond gap spacers provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

28. A method according to claim 26, wherein the bond gap spacers comprise spherical beads.

29. A method according to claim 28, wherein the spherical beads comprise glass microspheres.

30. A method according to claim 19, wherein the elastomeric adhesive is applied to the backboard bonding surface with a bond width in the range from about 1 cm to 2 cm.

31. A method of bonding an acrylic basketball backboard to a frame structure comprising:

(a) applying an elastomeric adhesive to a bonding surface of the frame structure;

(b) positioning the acrylic backboard onto the frame structure such that a bonding surface of the backboard contacts the elastomeric adhesive;

(c) maintaining a predetermined bond gap between the backboard bonding surface and the frame bonding surface; and

(d) allowing the elastomeric adhesive to cure.

32. A method according to claim 31, wherein the elastomeric adhesive is a silicone adhesive.

33. A method according to claim 31, wherein the elastomeric adhesive is a urethane adhesive.

34. A method according to claim 31, further comprising  
5 the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive.

35. A method according to claim 34, wherein the step  
10 of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises chemically treating the acrylic bonding surface to permit the elastomeric adhesive to penetrate the acrylic bonding surface.

36. A method according to claim 34, wherein the step  
15 of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises producing an image on the bonding surface with an ink that securely bonds to the bonding surface.

20 37. A method according to claim 31, further comprising the step of preparing the frame structure bonding surface to receive the elastomeric adhesive.

38. A method according to claim 37, wherein the step of preparing the frame structure bonding surface to receive the elastomeric adhesive comprises roughening the frame bonding surface.

5

39. A method according to claim 31, further comprising the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the elastomeric adhesive bond gap.

10

40. A method according to claim 39, wherein the bond gap spacers provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

15

41. A method according to claim 39, wherein the bond gap spacers comprise spherical beads.

42. A method according to claim 41, wherein the spherical beads comprise glass microspheres.

20

43. A method according to claim 31, wherein the elastomeric adhesive is applied to the backboard bonding surface with a bond width in the range from about 1 cm to 2 cm.

**AUTOMATED SYSTEM AND METHOD FOR BONDING  
AN ACRYLIC SURFACE TO A FRAME**

**Abstract of the Disclosure**

A basketball backboard assembly and a method of making  
the backboard assembly are disclosed. The assembly includes  
a backboard frame structure and an acrylic backboard which  
are bonded together with a suitable elastomeric adhesive,  
such as a silicone adhesive, providing adequate adhesion and  
flexibility. The elastomeric adhesive has a bond gap in the  
range from about 2 to 2.5 mm. The adhesive is catalyzed to  
provide control of the set time in the range from about 5  
minutes to 1 hour. A plurality of bond gap spacers are  
located between the frame bonding surface and the backboard  
bonding surface to provide the bond gap.

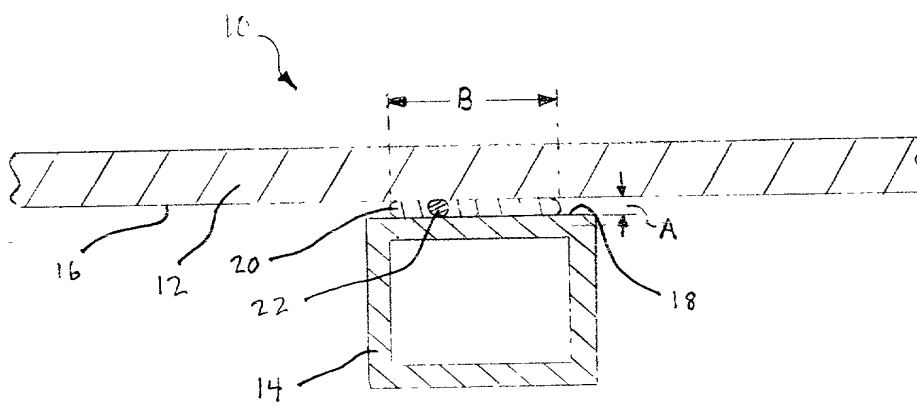


Fig. 1

***DECLARATION, POWER OF ATTORNEY AND PETITION***

I, Larry Stevens, declare: that I am a citizen of the United States of America; that my residence and post office address is 938 Raymond Road, Fruit Heights, Utah 84037; that I verily believe I am the original, first, and sole inventor of the subject matter of the invention or discovery entitled SYSTEM AND METHOD FOR BONDING AN ACRYLIC SURFACE TO A FRAME, for which a patent is sought and which is described and claimed in the specification attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims; and that I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Section 1.56 of Title 37 of the Code of Federal Regulations.

I declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful, false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint as my attorneys and/or patent agents those individuals associated with U.S. Patent and Trademark Office Customer No. 21552 with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. All correspondence and telephonic communications should be directed to Evan R. Witt at the address associated with Customer No. 21552.

Wherefore, I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, declaration, power of attorney, and this petition.

Signed at Cedarfield, Utah, this 5th day of  
(City) (State)  
January, 1998.

Inventor Larry Stevens  
Larry Stevens  
938 Raymond Road  
Fruit Heights, Utah 84037